


INSPIRON		Technical data					
		235	242	248	256	264	268
❶ Cooling Capacity	kw	34.2	42.2	47.2	55.2	63.2	68.4
❶ Cooling Capacity	kw	34.2	39.6	45.2	53	61	66.4
Absorbed Power	kw	13.26	15.31	16.55	21.20	23.46	25.92
Absorbed Power		13.57	14.61	16.14	20.78	23.55	25.84
E.E.R		2.58	2.76	2.85	2.60	2.69	2.64
E.E.R		2.52	2.71	2.80	2.55	2.59	2.57
ESEER		3.96	4.22	4.37	4.37	4.37	4.13
❷ Sound Level B.version	db(A)	76	76	76	79	80	80
❷ Sound Level P.version	db(A)	72	72	72	75	76	76
❷ Sound Level s.version	db(A)	68	68	68	71	72	72
Scroll Compensor No	no	2	2	2	2	2	2
Step Compensor	no	2	2	2	2	2	2
Circuits	no	1	1	1	1	1	1
Electrical Suply	V-Ph-Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
water flow	m3/hr	5.3	6,5	7.3	8.6	9.8	10.6
W- width	mm	1500	1500	1500	1500	1500	1500
D- depth	mm	1210	1210	1210	1210	1210	1210
H- Height	mm	2200	2200	2200	2200	2200	2200
❸ Weight B.version	Kg	480	530	580	630	900	950
❸ Weight P.version	Kg	530	580	630	680	950	1010
❸ Weight S.version	Kg	530	580	630	680	950	1010
Refrigerant		R-407c-R410c					

Performance according to EN 14511.

- ❶ Outdoor air temperature 35°C DB/24°C WB - chilled water temperature inlet/outlet 12/7°C.
 - ❷ In open Field (Q = 2) at 10 m from the unit
 - ❸ Total sound power level in dB(A) based on measurements carried out in accordance with regulation UNI EN-ISO 9614.
 - ❹ Weight referred to the unit without load and not accessorised
- silent version

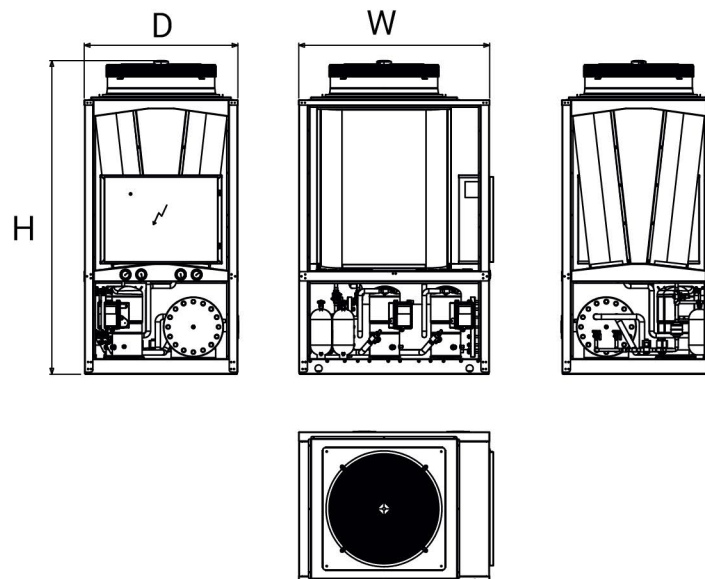

INSPIRON		Technical data					
		280	2110	3120	4160	4190	4220
① Cooling Capacity	kw	80.4	108.4	120.6	160.8	189	216.8
① Cooling Capacity	kw	76.38	103	114.6	152	179.5	206
Absorbed Power	kw	30.12	40.92	45.18	60.24	72.84	81.84
Absorbed Power	kw	26.20	38.88	42.93	56.94	69.18	77.76
E.E.R		2.58	2.76	2.85	2.60	2.69	2.64
E.E.R		2.51	2.65	2.67	2.67	2.59	2.65
ESEER		4.08	4.05	4.08	4.08	3.98	4.05
② Sound Level B.version	db(A)	79	81	82	83	83	83
② Sound Level P.version	db(A)	72	72	72	75	76	76
② Sound Level s.version	db(A)	68	68	68	71	72	72
Scroll Compensor No	no	2	2	3	4	4	4
Step Compensor	no	2	2	3	4	4	4
Circuits	no	1	1	2	2	2	2
Electrical Suply	V-Ph-Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
water flow	m3/hr	12.5	16.8	18.7	24.9	29.3	33.6
W- width	mm	2143	2143	2143	2143	2143	2143
D- depth	mm	1210	1210	3050	3050	3050	3050
H- Height	mm	2200	2200	2200	2200	2200	2200
④ Weight B.version	Kg	990	1020	1320	1480	1550	1650
④ Weight P.version	Kg	1040	1060	1420	1580	1650	1850
④ Weight S.version	Kg	1040	1060	1420	1580	1650	1850
Refrigerant		R-407c-R410c					

Performance according to EN 14511.

- ① Outdoor air temperature 35°C DB/24°C WB - chilled water temperature inlet/outlet 12/7°C.
 - ② In open Field (Q = 2) at 10 m from the unit
 - ③ Total sound power level in dB(A) based on measurements carried out in accordance with regulation UNI EN-ISO 9614.
 - ④ Weight referred to the unit without load and not accessorised
- silent version

